


Dimensions – Unité intérieure (1/2)

• 12 kBtu/h




Air inlet side view

Electric control box

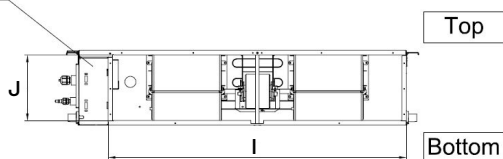


Opposite pipe side view

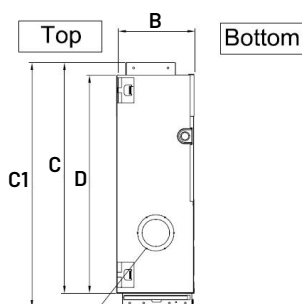


Fresh air intake


Air outlet side view

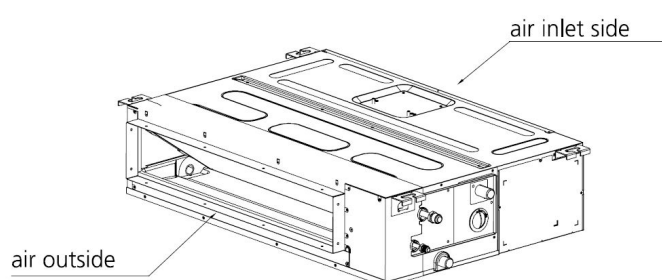

Top view

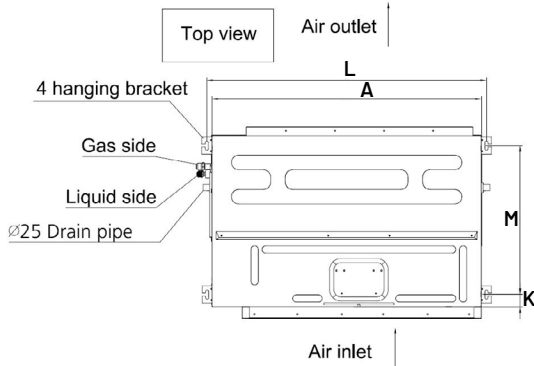







Pipe side view

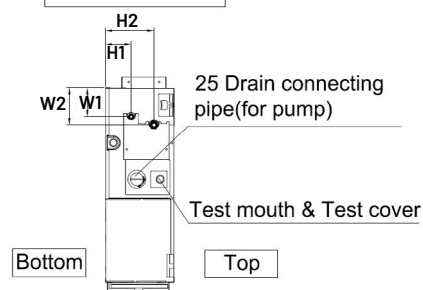

Capacity (kBtu/h)	Unit	Outline dimension					Air outlet opening size				Air return opening size			Size of install hanger		Size of refrigerant pipe			
		A	B	C	C1	D	E	F	G	H	I	J	K	L	M	H1	H2	W1	W2
IDSV 122DRIV3	mm	700	200	470	506	450	137	537	30	152	599	186	50	741	360	84	140	84	84
	inch	27.6	7.9	18.5	19.9	17.7	5.4	21.1	1.2	6.0	23.6	7.3	2.0	29.2	14.2	3.3	5.5	3.3	3.3

Dimensions - Unité intérieure (2/2)

• 18 à 60 kBTu/h

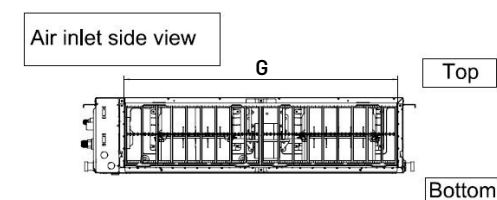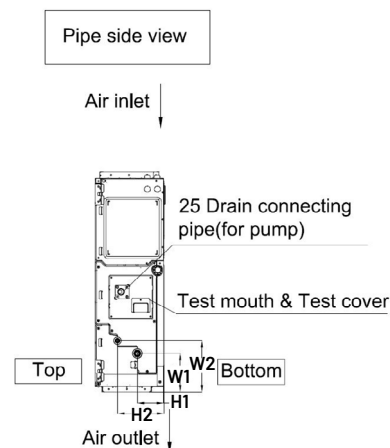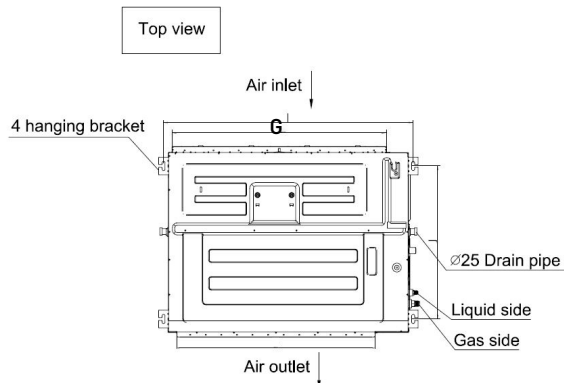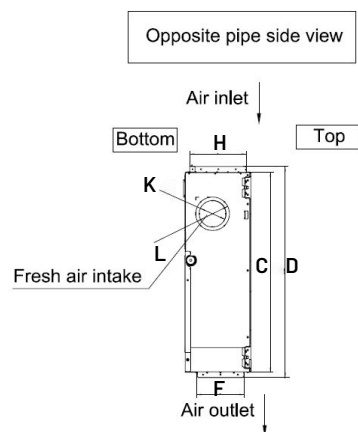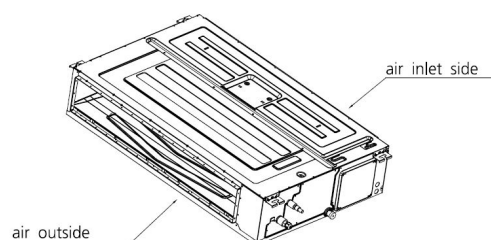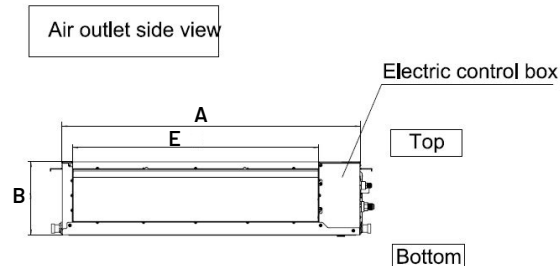

Capacity (kBTu/h)	Unit	Outline Dimension				Air Outlet Opening Size		Air Return Opening Size		Size of Mounted Lug		Fresh Air Intake Opening Size		Size of refrigerant pipe			
		A	B	C	D	E	F	G	H	I	J	K	L	H1	H2	W1	W2
IDSV182DRIV3	mm	700	245	750	795	527	178	592	212	740	640	100	126	72	144	120	165
	inch	27.6	9.6	29.5	31.3	20.7	7.0	23.3	8.3	29.1	25.2	3.9	5.0	2.8	5.7	4.7	6.5
IDSV242DRIV3 IDSV302DRIV3	mm	1000	245	750	795	827	178	892	212	1040	640	100	126	80	151	120	165
	inch	39.4	9.6	29.5	31.3	32.6	7.0	35.1	8.3	40.9	25.2	3.9	5.0	3.1	5.9	4.7	6.5
IDSV362DRIV3 IDSV422DRIV3 IDSV482DRIV3	mm	1200	245	750	795	1027	178	1092	212	1240	640	100	126	80	151	120	165
	inch	47.2	9.6	29.5	31.3	40.4	7.0	43.0	8.3	48.8	25.2	3.9	5.0	3.1	5.9	4.7	6.5
IDSV602DRIV3	mm	1200	300	750	795	1027	233	1092	267	1240	640	125	160	102	163	101	160
	inch	47.2	11.8	29.5	31.3	40.4	9.2	43.0	10.5	48.8	25.2	4.9	6.3	4.0	6.4	4.0	6.3