



MONO SPLIT MURAL R410 - Froid - T3

HIGH WALL SPLIT R410 - Cooling - T3

MONO

MURAL ISSAG T3


HIGH WALL SPLIT

ISSAG 121 T3 ISSAG 281 T3
ISSAG 181 T3 ISSAG 301 T3
ISSAG 241 T3 ISSAG 361 T3

**Modèle T3:
special température
extrêmes**

**20 ans
d'expérience
dans plus
de 30 pays**

T3

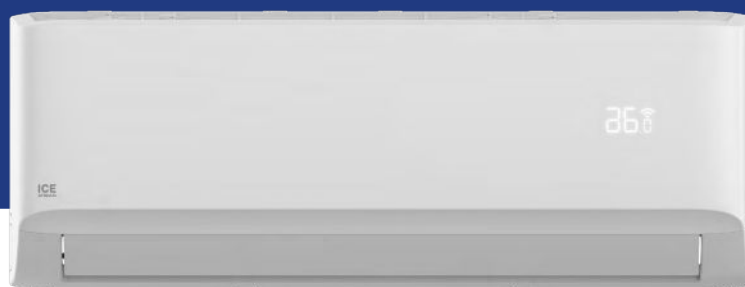

PCB, compresseur, design:
spécialement adapté aux pays chauds
For extremely hot temperature



Finitions élégantes
Smart design



Programmateur, mode nuit et turbo
Timer, sleeping and turbo mode



Mémorisation de la dernière position
Last position registered



Filtre haute densité
High density filter

MONOS SPLIT MURAL DC T3		ISSAG					DC T3 HIGH WALL SPLIT	
Alimentation électrique		MONO 220-240/1/50					Power supply	
V/Ph/Hz		MONO 220-240/1/50					V/Ph/Hz	
Puissance	Btu/h	12 000	18 000	23 300	28 300	30 000	36 000	Capacity
Consommation	W	980	1 530	1 875	2 330	2 500	3 297	Input
Intensité	A	4.35	6.79	8.2	10.5	11.1	14.5	Operating current
EER	W/W	3.59	3.45	3.64	3.56	3.52	3.20	EER
Mode FROID		COOLING						
Unités intérieures		ISSAG 12IT3	ISSAG 18IT3	ISSAG 24IT3	ISSAG 28IT3	ISSAG 30IT3	ISSAG 36IT3	Indoor Unit
Débit d'air	m3/h	568/487/370	1060/960/887	1150/1050/1000	1320/1130/1010	1517/1313/1163	1320/1130/1010	Air flow
Surface d'action	m2	16-23	24-35	31-46	38-55	40-59	45-66	Application area
Niveau sonore	dB(A)	40/37/29	46/43.5/41	47/45/43	50/46/42	51/47/44	51/47/44	Noise level
Télécommande		Oui/Yes	Oui/Yes	Oui/Yes	Oui/Yes	Oui/Yes	Oui/Yes	Remote control
Dimensions nettes (LxPxH)	mm	802x200x295	1082x234x337	1082x234x337	1259x283x362	1259x283x362	1259x283x362	Net dimensions (WxDxH)
Dimensions emballage (LxPxH)	mm	875x285x380	1155x415x315	1155x415x315	1340x450x385	1340x450x385	1340x450x385	Packing dimensions (WxDxH)
Poids net/emballé	Kg	8.9/11.4	14.9/18.5	13.8/17.4	19.8/25.3	19.4/24.9	19.8/25.3	Net/Gross weight
Unités extérieures		ISSAG 12IT3	ISSAG 18IT3	ISSAG 24IT3	ISSAG 28IT3	ISSAG 30IT3	ISSAG 36IT3	Outdoor Unit
Niveau sonore	dB(A)	53.5	56	59.5	58	58	58	Noise level
Dimensions nettes (LxPxH)	mm	805x330x554	805x330x554	890x342x673	946x410x810	946x410x810	946x410x810	Net dimensions (WxDxH)
Dimensions emballage (LxPxH)	mm	915x370x615	915x370x615	995x398x740	1090x500x885	1090x500x885	1090x500x885	Packing dimensions (WxDxH)
Poids net/emballé	Kg	32.3/35	39.5/42.1	50.4/53.6	66/69.9	68.3/72.8	65.3/69.8	Net/Gross weight
Compresseur		ROTARY/GMCC PA180G2C-7FTS	ROTARY/GMCC PA180G2C-7FTS	ROTARY/GMCC ASG240V1SFT	ROTARY/GMCC PA291X3CS-7MTM	SCROLL/GMCC SADA031V1SLB	ROTARY/GMCC ATQ360V1SMT	Compressor
Fluide et raccordement frigorifique								Refrigerant
Fluide		R410a	R410a	R410a	R410a	R410a	R410a	Refrigerant type
Quantité de fluide préchargé	Kg	0.8	1.04	1.75	2.1	2.25	2.2	Gas charge
Diamètre des liaisons liquide-gaz	mm	Φ6.35/Φ12.7 (1/4-1/2)	Φ6.35/Φ12.7 (1/4-1/2)	Φ9.52/Φ15.9 (3/8-5/8)	Φ9.52/Φ15.9 (3/8-5/8)	Φ9.52/Φ15.9 (3/8-5/8)	Φ9.52/Φ19 (3/8-3/4)	Liquid side/Gas side
Longueur de liaison maximum	m	20	25	25	25	25	25	Max. refrigerant pipe length
Dénivelé maxi entre UI et UE	m	8	10	10	10	10	10	Max. difference in level
Raccordement électrique								Connecting wiring
Intensité maximum	A	9.5	13.5	19	25	23.5	25	Max. current
Cable d'interconnection	Ø mm	3x1.5	3x2.5	4x2.5	4x1.5	4x1.0	4x1.0	Connecting wiring
Chargement								Loading
Quantité 20°/40°/40°HQ		90/190/222	78/168/194	64/134/156	36/76/88	36/76/88	36/76/88	Quantity 20°/40°/40°HQ