


ICESTREAM®

icestream.fr

GAINABLES pour MULTI R32 Froid et Chaud

DUCTS for MULTI R32 Cooling & Heating

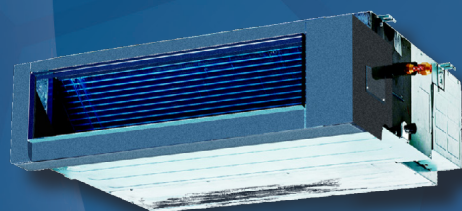

2.5 KW - 3.5 KW - 5 KW

MODELES			IDS 092DRI	IDS 122DRI	IDS 182DRI	MODELS		
Refroidissement	Capacité	Kw	2.5	3.5	5	Kw	Capacity	Cooling
	Consommation	W	180	185	200	W	Input	
Chauffage	Capacité	Kw	3	3.8	5.5	Kw	Capacity	Heating
	Consommation	W	180	185	200	W	Input	
Vitesse		r/min	790/920/1080	850/1030/1170	1000/1300/1650	r/min	Speed	
Débit d'air		m3/h	230/340/500	300/480/600	350/650/880	m3/h	Indoor air flow (Hi/Mi/Lo)	
Cable d'interconnection UI-UE			5x1.5	5x1.5	5x1.5	IU-OU connecting wiring		
Niveau sonore		dB(A)	27.5/34.5/40	27.5/34.5/40	33/38/41.5	dB(A)	Indoor noise level (Hi/Mid/Lo)	
Pression		mpa	4.3 / 1.7	4.3 / 1.7	4.3 / 1.7	mpa	Design pressure	
Dimensions	Unité (Lxlxh)	mm	700x450x200	700x450x200	880x674x210	mm	Unit (W*D*H)	Dimension
	Emballage (Lxlxh)	mm	860x540x275	860x540x275	1070x725x280	mm	Packing (W*D*H)	
	Poids net/emballé	Kg	18/22	18/22	24.3 / 29.6	Kg	Net/Gross weight	
Télécommande filaire			Oui/Yes	Oui/Yes	Oui/Yes	Wired remote control		