


UNITES INTERIEURES COMPATIBLES

MURAL ISSAG pour MULTI

1.8 KW
2.5 KW
3.5 KW
5 KW
7 KW

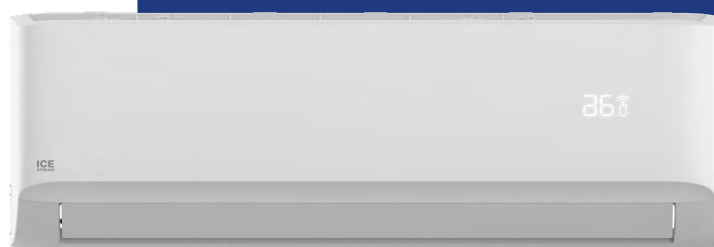

MURAL ISSAG pour MULTI			ISSAG 072 1,8kW	ISSAG 092 2,5kW	ISSAG 122 3,5kW	ISSAG 182 5kW	ISSAG 242 7kW
Mode Froid	Puissance	kW	1,8	2,6	3,5	5,3	7,0
	Puissance nominale absorbée/Consommation	kW		0,62 (0,08 - 1,1)	1 (0,13 - 1,65)	1,55 (0,56 - 2,05)	2,40 (0,42 - 3,2)
Mode Chaud	Puissance	kW	2,1	3,2	3,9	5,5	7,3
	Puissance nominale absorbée/Consommation	kW		0,65 (0,07 - 0,99)	0,97 (0,16 - 1,56)	1,75 (0,78 - 2,0)	2,13 (0,3 - 3,1)
Certification Eurovent				OUI	/	/	/

Unités intérieures		ISSAG 072DRIV2	ISSAG 092DRI	ISSAG 122DRI	ISSAG 182DRI	ISSAG 242DRI
Débit d'air	m3/h	460/330/260	560	630	800/600/500	1090/770/610
Vitesse	r/min	1050/700	1050/450	1100/900/750	1150/1000/850	1150/1000/850
Niveau sonore	dB(A)	40/30/26/21	37/31/22/19	39/33/22/21	41/37/31/20	46/37/34/21
Cable d'interconnection UI UE			4 x 1,5	4 x 1,5	4 x 1,5	4 x 1,5
Liaison frigorifique	pouce	1/4 - 3/8	1/4 - 3/8	1/4 - 3/8	1/4 - 1/2	3/8 - 5/8
Dimensions nettes (LxPxH)	mm	726x210x291	835x208x295	835x208x295	969x320x241	1083x336x244
Poids net	Kg	8	8,7	8,7	11,2	13,6
Télécommande		Infrarouge, livré de série Option: Télécommande filaire, avec programmation hebdomadaire / interface N2				



En série



En option

